

CP422S2-240V

SINGLE PHASE CARDBOARD SHREDDER
WITH THREE PHASE INVERTER



Medium-duty 1-phase shredder
that produces void fill or protective
matting material from used
cardboard packaging






CP422S2-240V

SINGLE PHASE CARDBOARD SHREDDER WITH THREE PHASE INVERTER

Features include:

- > Turn small quantities of old cardboard into lots of packaging material within a short time.
- > Creates high-bulk void fill and protective matting material which reduces packaging costs and is ecologically beneficial.
- > Operator-friendly carton feed with punched measuring scale for precise packaging units.
- > Variable carton sizes automatically processed in a single step.
- > Energy-efficient drive technology powered through a frequency inverter gives:
 - > High motor torque for more powerful shredding action, even at low speeds
 - > Low maintenance reduces loss of productivity through downtime
 - > Improved power consumption/performance ratio
- > Machine weight: 125kg

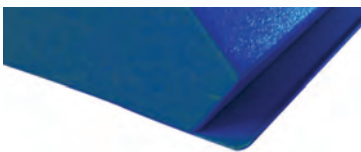

An integral pinch guard is now fitted to the infeed on all Optimax® Shredders to ensure compliance with BSi safety legislation



Fitted with IEC/EN 60204-1 compliant circuit breaker



High bulk void fill from waste cartons



Protective matting for wrapping and layering



Compatible with SFP100-1K Dust Extractor

- > Reduce and collect airborne dust
- > 3mtr connection hose
- > Single phase model



Optimax puts operator safety first

Only the Optimax® range of cardboard shredders complies with BS EN ISO 13857:2008



Optimax is the first manufacturer to offer compliance with BS EN ISO 13857:2008 across its entire range of cardboard shredders.

This standard is the UK implementation of EN ISO 13857:2008 and stipulates that a 20mm-high opening to a blade mechanism must incorporate a minimum safety distance of 120mm.

As market leader in product innovation and operator safety, Optimax has exceeded these requirements to provide a safety distance of 140mm.

Specifications



Cuts
420mm
wide



Unlimited
run time



Dust
extraction
device



200V-400V
50-60Hz
1.5kW



Cuts
18mm
thick



Output
4-6m³/hr
Feed rate
13mtr/min



W: 660mm
D: 660mm
H: 980mm



Warranty
12 months
as standard

For more information on the complete range of Optimax® packaging products, please contact your authorised Optimax® distributor or visit:

www.optimax.eu.com

© Packaging Brands Ltd 2018
Optimax® is a registered trademark of Packaging Brands Ltd.
We reserve the right to change product specifications without prior notice
Re-order Code: LIT-PP026

