


CT30R

SEMI-AUTOMATIC, AIR ASSISTED,
RANDOM-SIZE CARTON CASE TAPER



Automatically adjusting to accommodate varying carton dimensions, and with a maximum speed of 1,200 cartons per hour, the CT30R provides heavy duty, reliable case taping for high-volume packing and despatch areas.

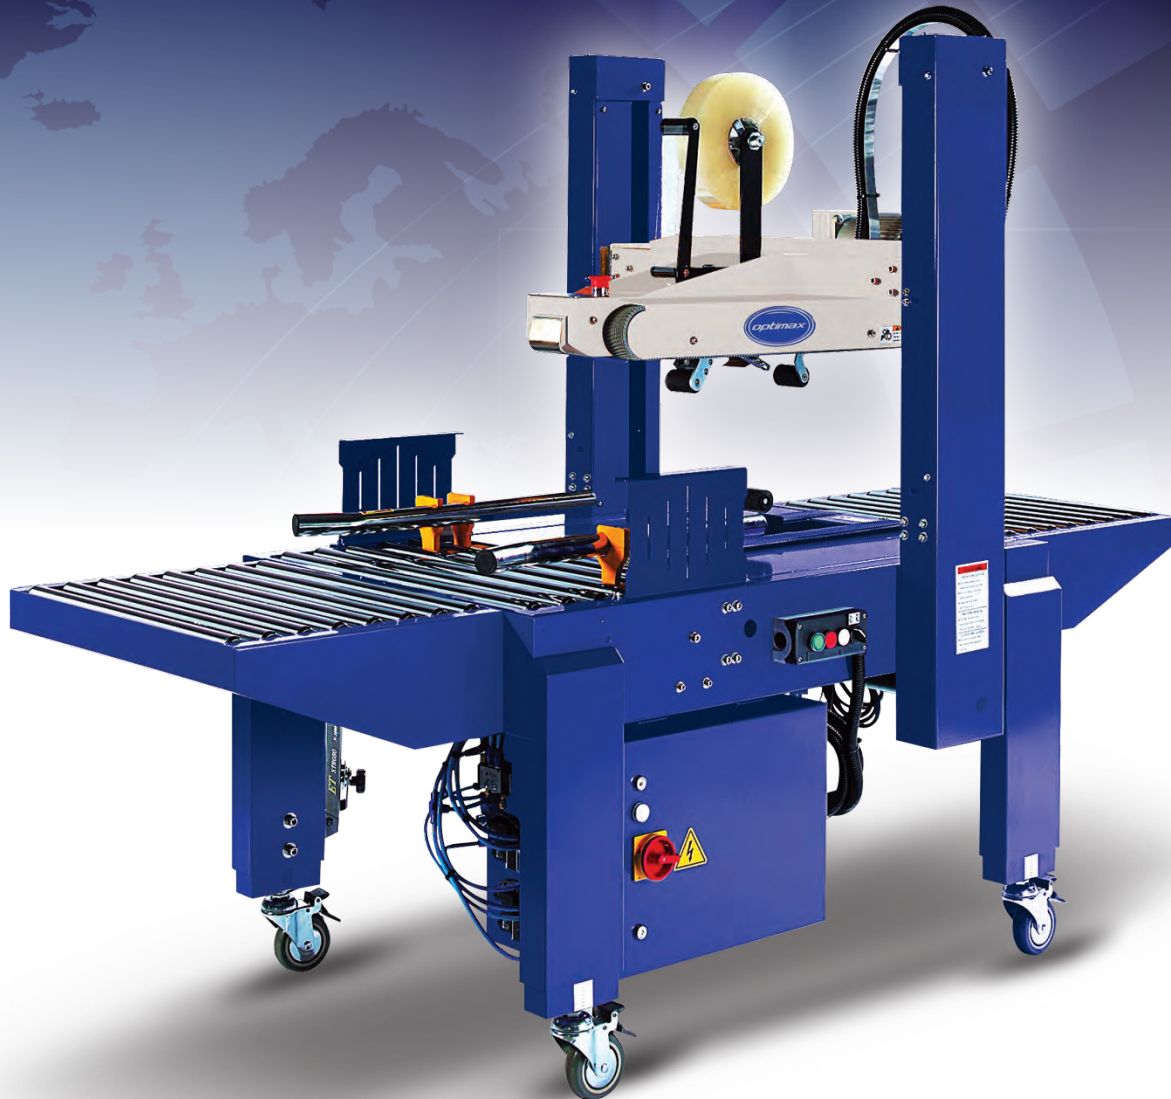


CT30R

SEMI-AUTOMATIC, AIR ASSISTED,
RANDOM-SIZE CARTON CASE TAPER

Features include:

- > Automatically adjusts to accommodate varying carton dimensions.
- > Simple use and maintenance
- > Seals up to 1200 cartons per minute
- > Seals 150 - 500mm wide and 120 - 500mm high cartons
- > Outfeed and infeed conveyors as standard
- > Braking swivel castors
- > Adjustable table height option
- > Reliable, energy efficient operation

Maximum/minimum carton
dimensions capacity

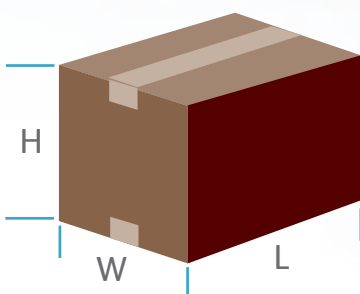

	Min	Max
L:	120	∞
W:	150	500
H:	130	500




Specifications

Model:	CT30R
Tape width:	37.5mm (1.5") or 50mm (2")
Belt speed:	23mtr per minute (9-20 cartons/min)
Carton capacity:	Length = 120mm - ∞ Width = 140 - 500mm Height = 120- 500mm
Power supply:	240V, 50Hz 1-phase
Power consumption:	450W
Machine dimensions:	1170 x 930 x 1550mm (L x W x H)
Machine nett weight:	153kg

Options

- > 3" taping head
- > Safety guard

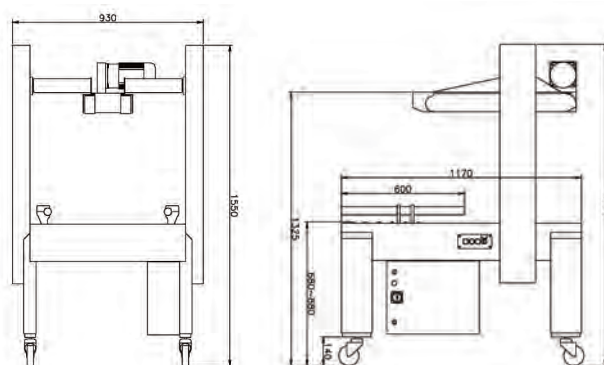

info

The CT30R is an air assisted model that requires a compressed air supply.

Please contact our technical service centre for more information.

For more information on the complete range of Optimax® packaging products, please contact your authorised Optimax® distributor or visit:

www.optimax.eu.com

© Packaging Brands Ltd 2018
Optimax® is a registered trademark of Packaging Brands Ltd.
We reserve the right to change product specifications without prior notice.
Re-order Code: LIT-PSF017